


Type UN-GN

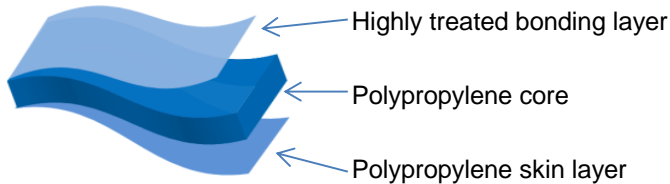

FEATURES

- Highly treated surface for adhesive bonding
- Non-sealable, general purpose film for tape and floral markets
- Available treated or untreated
- High clarity

TECHNICAL DATA

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES						
Thickness (gauge)				60	70	75	100	120	140	200
Yield			in2/lb	51,500	44,000	41,500	30,600	25,500	22,200	15,300
Haze		ASTM D1003	%	1.2	1.2	1.3	1.5	1.5	1.5	1.5
Gloss		ASTM D2457	%	90	90	90	90	90	90	90
Tensile Strength	MD	ASTM D882	psi	20,000	20,000	20,000	20,000	20,000	20,000	20,000
	TD									
Elongation	MD	ASTM D882	%	150	150	150	150	150	150	150
	TD									
Shrinkage	MD	Uniscite, 275°F	%	6	6	6	6	6	6	6
	TD									
Surface Tension		Uniscite	dynes	44	44	44	44	44	44	44

The data presented on this document represent typical values only. We accept no responsibility for results obtained by the application of this information or the safety or suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product or product combination for their own purposes.