


Type UN-LBL

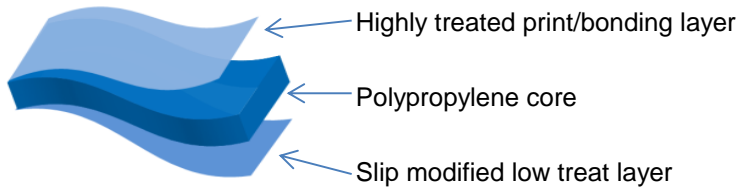

FEATURES

- High gloss/clarity
- Highly treated for printing and lamination
- Non-sealable outer web for roll fed label laminations
- Highly stable slip system for consistent COF performance

TECHNICAL DATA

PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUES				
Thickness (gauge)			60	70	75	100	120
Yield		in2/lb	51,500	44,000	41,500	30,600	25,500
Haze	ASTM D1003	%	1.5	1.5	1.5	1.5	1.5
Gloss	ASTM D2457	%	90	90	90	90	90
Tensile Strength	ASTM D882	psi	20,000	20,000	20,000	20,000	20,000
MD		psi	20,000	20,000	20,000	20,000	20,000
TD		psi	38,000	38,000	38,000	38,000	38,000
Tensile Modulus	ASTM D882	psi	200,000	200,000	200,000	200,000	200,000
MD		psi	200,000	200,000	200,000	200,000	200,000
TD		psi	320,000	320,000	320,000	320,000	320,000
Elongation	ASTM D882	%	180	180	180	180	180
MD		%	180	180	180	180	180
TD		%	60	60	60	60	60
Shrinkage	Uniscite, 275°F	%	7	7	7	7	7
MD		%	7	7	7	7	7
TD		%	5	5	5	5	5
COF	ASTM D1894		0.5	0.5	0.5	0.5	0.5
Surface Tension	Uniscite	dynes	44	44	44	44	44

The data presented on this document represent typical values only. We accept no responsibility for results obtained by the application of this information or the safety or suitability of our products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product or product combination for their own purposes.